

Bollards Series

360° Low-Level Lighting
Energy-Saving "Green" LED



NEW

We reserve the right to revise the design or components of any product without notice.

Catalog Number	
Project/Location	Type
Approved By	

SPECIFICATIONS

- HOUSING— Extruded Aluminum with Domed Top. Style A: Type 3 Clear Prismatic Borosilicate Glass Refractor; Style B: Type 5 Clear Prismatic Borosilicate Glass; Style C: Aluminum Louver; Style D: Adjustable Reflector Available.
- FINISH— Nine-Stage Powder Coat Process
- LENS— Clear Polycarbonate
- BALLAST— Internal Gear/Ballast Tray
- LAMP— Super Bright-White LED. 15 Watt — Cool White
- MOUNTING — Flush Mounting Base, Vandal-Resistant Screws
- UL/ULC— UL/ULC Listed to U.S. and Canadian safety standards - Suitable for wet locations

Style A: Type 3 Glass
Style B: Type 5 Glass




Style C: Louver



Style D: Adjustable Reflector



Catalog Number Ordering Guide

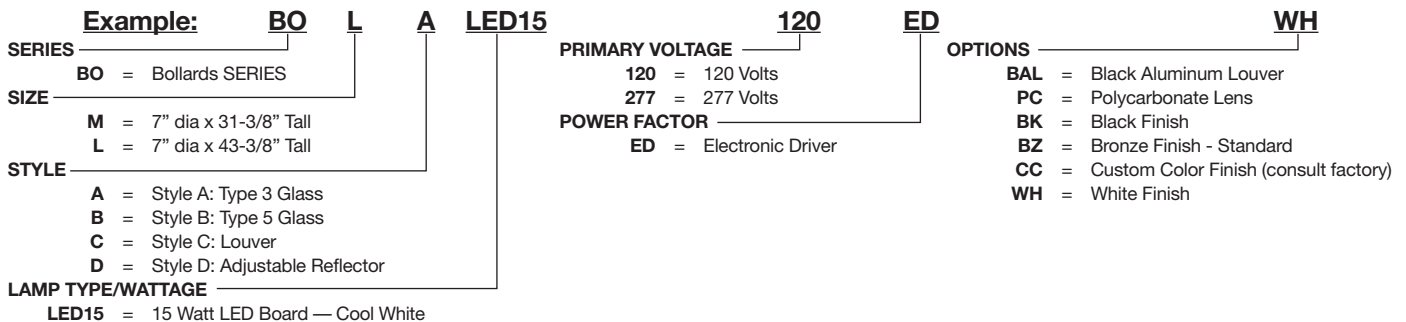

9245 W. Ivanhoe St. | Schiller Park, IL 60176 | p: (847) 260-0333 | f: (847) 260-0344
www.eclipselightinginc.com | quotes@eclipselightinginc.com

© 2008 Eclipse Lighting Inc.
All Rights Reserved - Designs Protected by Copyright

Rev. 01/09 | 1